
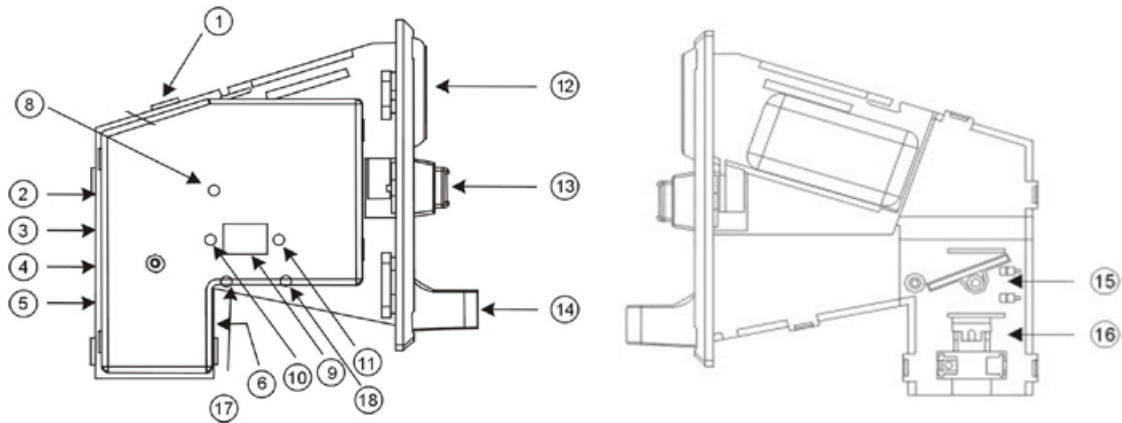


Automatic Coin Acceptor 616



Projcet	Name	Function
1	LED light	power light
2	Four pin plug	
3	Two way switch	Distinguish NO (normally open) and NC (normally closed)
4	Three way switch	Output signal(fast)20ms(medium)50ms(slow)100ms
5	Two pin plug	Function forbidden signal DC12V
6	Two pin plug	Electromagnetic strobe DC12V
8	Microswitch	Reset sampling indication
9	Digital control variable 8	Display condition and function
10	Microswitch	Condition display numerical value increase“+”
11	Microswitch	Condition display numerical value increase“-”
12	Coin slot	
13	Press-button for removal of coin blcoked	
14	Coin return slot	
15	Position of electromagnetic strobe	Rule out false coin

Automatic Coin Acceptor 616

16	Anti-phishing&stealing points mechanism	The speculative runs
----	---	----------------------

Product features

1. intelligent CPU control, accurate score, coin recognition accuracy is very high. The speed of recognition is ≤ 0.6 Seconds.
2. do not need to through the computer, automatic setting program. Intelligent anti shock and electromagnetic interference, automatic fault detection.
3. can receive 8 coins, can set their own pulse ratio, support multiple currency only outputs a pulse.
- 4 .can increase the bans accepting coins function: connect the black line, by the /Hi (0-3V), /Low (3.5-5.0V) is prohibited.
connect the red line, by the /Hi (2-5V), /Low (1.6V) is prohibited.
5. built-in test coins the size of the program.
- 6 .turning device, completely solve the card currency.
- 7 .for the coin recognition signal output normally open and normally closed switch
- 8.I allow the connection time timing controller 8.
- 9 .able to accept all the coins and tokens in the world.
10. easy installation.
- 11.One year quality guarantee

programmed

1. At the same time hold together (ADD) and (MINUS), Wait a few seconds, Wait A few seconds, let go of the button, the digital screen displays (A)

Automatic Coin Acceptor 616

2. Hold the let go after a few seconds (SET) key, digital display screen displays (E). Use (ADD) or (MINUS) key, set the number of COINS.

3. After the completion of the setting, press and hold (SET) key after a few seconds. Digital display, display (H1). Use (ADD) or (MINUS) key, Set **the number of sampling**

4. After the completion of the setting, press and hold (SET) key after a few seconds, Digital display, display (P1). Use (ADD) or (MINUS) key, Set the pulse number

5. After the completion of the setting, press and hold (SET) key after a few seconds, Digital display, display (F1), Use (ADD) or (MINUS) key, Set a set of COINS precision (generally set 5-10). After the completion of the setting, press and hold (SET) key after a few seconds.

Has been completed set, digital display shows (A) again.

After the completion of the setting, press and hold (SET) key after a few seconds, Digital display, display (E), Off the power supply, to open the power supply, complete set program, and then start sampling.

Automatic Coin Acceptor 616

Select the samples

1. After the completion of the setting, press and hold (SET) key after a few seconds, Digital display, display (A1), Put a coin samples, After completion, digital display screen will display again flashing (A1).

2. After the completion of the setting, press and hold (SET) key after a few seconds, Digital display, display (A2), Said the second coin samples.

You repeat the steps until the selected coin more complete.

To open the electric power supply and the system automatically restart, can so.

Restore the factory Settings

1. Turn the power off.
2. Press and hold (SET) and (ADD).
3. Open the power supply
4. Hear drops, let go of the (SET) and (ADD)
5. Compl

Application:

Our coin acceptor widely used in coin kiosk, car washing machine, TV, massage chair, cloth dryer, cyber coffee,

Automatic Coin Acceptor 616

Laundromat, laundry, computer ,amusement machine ,
arcade machine etc .